

SECTION 2-E ASPHALT PAVEMENT DETAIL

CITY OF SACHSE, TEXAS
DEPARTMENT OF ENGINEERING

STANDARD CONSTRUCTION DETAILS
PAVING


ASPHALT PAVEMENT DETAIL

APPROVED:

DATE: NOVEMBER 2008

REVISED:

Page 1

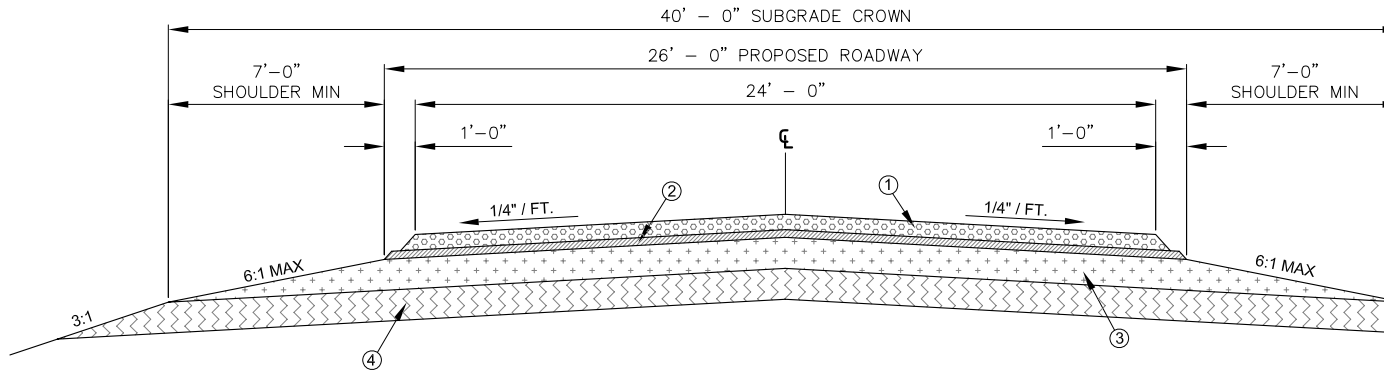

DRAINAGE: ROADWAY BAR DITCH DRAINAGE TO BE PROVIDED ALONG EACH SIDE OF THE SECTION.

PROPOSED TYPICAL SECTION FOR ROADWAYS

LEGEND:

- ① - 2" ASPHALT CONCRETE PAVEMENT, TYPE D (220#/S.Y.)
- ② - ASPHALT PRIME COAT (EST. 0.25 GAL/S.Y.)
- ③ - ALTERNATE A - 2 COURSE - TOTAL 12" COMPACTED APPROVED FLEXIBLE BASE MATERIAL STABILIZED WITH 5% LIME BY WEIGHT
- ③ - ALTERNATE B - 6" FOUNDATION COURSE CRUSHED AGGREGATE FLEXIBLE BASE. SHALL CONFORM TO THE FOLLOWING REQUIREMENTS: TYPE A GRADE 2
- ④ - 6" LIME TREATED SUBGRADE COMPACTED TO 95% STANDARD PROCTOR DENSITY AT OPTIMUM MOISTURE, 6% LIME BY WEIGHT

NOTE: This section is to be considered only after specific approval is given by action of the City Council. Typical location for this roadway section would be for the reconstruction of existing City/County roadway sections, new street alignment to be constructed between existing roadway considered semi-temporary with the construction to be undertaken by the County Road and Bridge Crews or Contract work approved by the City.

CITY OF SACHSE, TEXAS		
DEPARTMENT OF ENGINEERING		
STANDARD CONSTRUCTION DETAILS		
PAVING		
ASPHALT PAVEMENT DETAIL		
APPROVED:		
DATE: NOVEMBER 2008	REVISED:	Page 2